

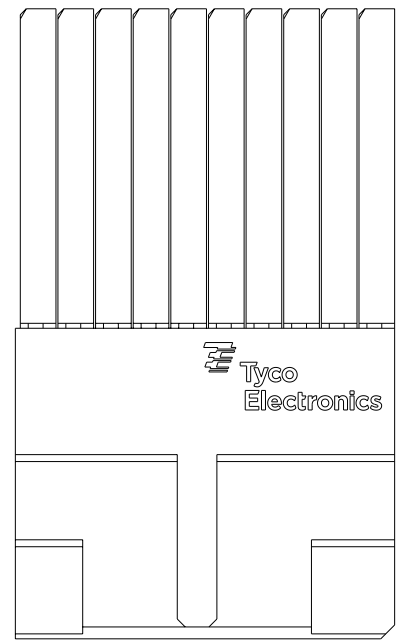
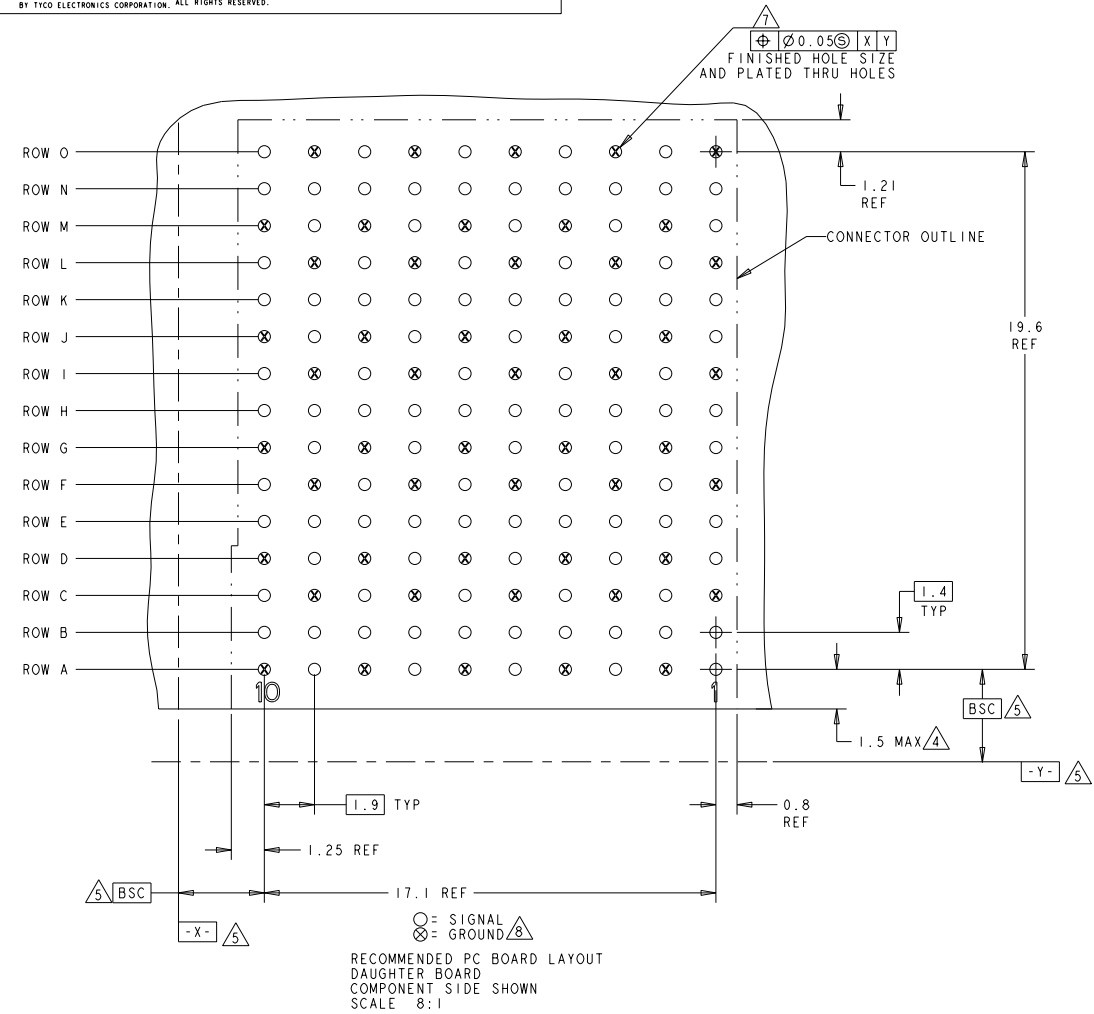


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2008
 COPYRIGHT 2008 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DRN	APPD		
1		PROPOSED	02MAY2008	WS	CR		
2		REVISED	30MAY2008	JKS	CR		
3		REVISED	10JUL2008	JKS	CR		

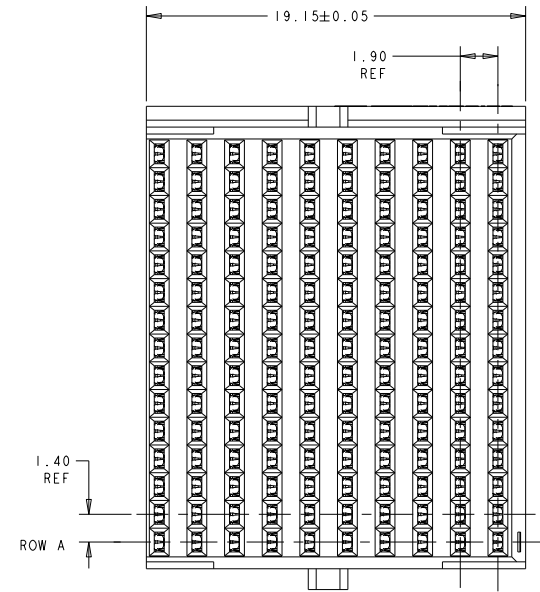

- △ MATERIAL:
CONTACT AND SHIELD: PHOS BRONZE
HOUSING AND CHICKLET: LCP, UL 94V-0, COLOR: BLACK
- △ FINISH: CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION, 108-2303-1; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III; APPLICATIONS IN CONTROLLED ENVIRONMENTS. (CENTRAL OFFICE)
- △ CONNECTOR MARKED WITH PART NUMBER, DATE CODE, 85 OHM, AND STANDARD IN APPROXIMATE AREA SHOWN.
- △ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ FINISHED HOLE = $\varnothing 0.46 \pm 0.05$
 TYPICAL HOLE DETAIL:
 DRILLED HOLE = $\varnothing 0.55 \pm 0.05$
 COPPER THICKNESS = 0.038 ± 0.013
 TIN THICKNESS = 0.008 ± 0.004
 FINISHED HOLE = $\varnothing 0.46 \pm 0.05$
- △ THE GROUNDS IN EACH COLUMN ARE COMMONED.

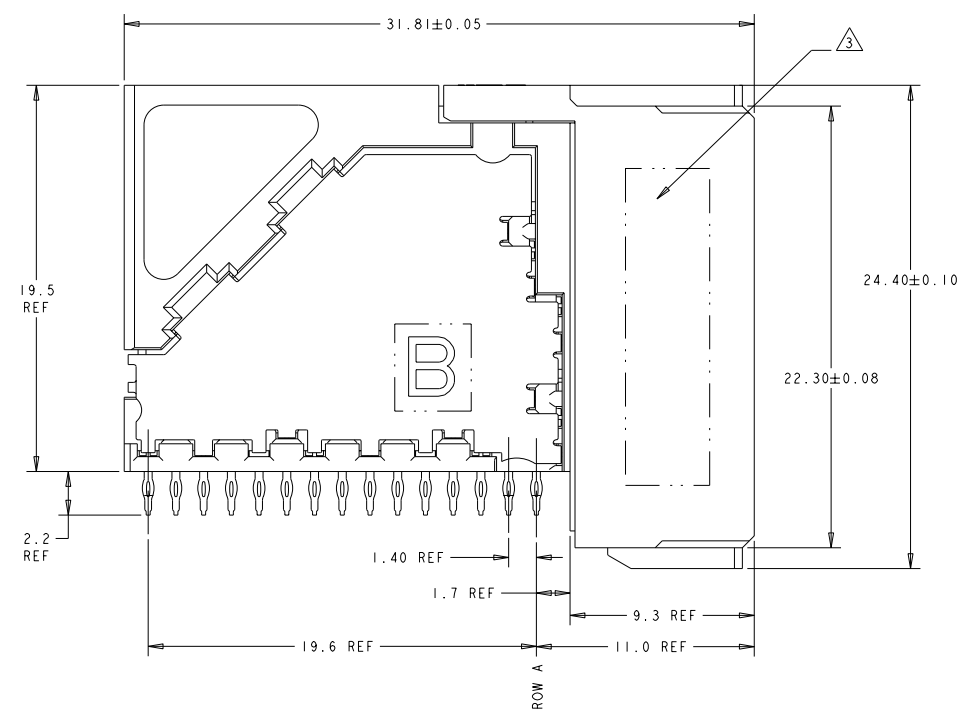

THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

1934932-1
 PART NUMBER

PRELIMINARY - NOT RELEASED FOR PRODUCTION

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN BY: SOURBEER 02MAY2008		CHECKED BY: RITZER 02MAY2008		Tyco Electronics Harrisburg, PA 17105-3608	
0 PLC ± .1		1 PLC ± .15		APPROVED:		NAME:		RECEPTACLE ASSEMBLY, 5 PAIR, 10 COLUMN, TinMan 85 OHM	
2 PLC ± .2		3 PLC ± .3		APPLICATION SPEC:		SIZE:		A 00779 1934932	
4 PLC ± .4		ANGLES ± .1		WEIGHT:		SCALE:		6:1	
MATERIAL:		FINISH:		CUSTOMER DRAWING:		SHEET:		1 OF 3	