


- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
- 2 CONTACT MATERIAL: PHOSPHOR-BRONZE.
- 3 CONTACT FINISH:(D)
 UNDERPLATE (ENTIRE CONTACT):
 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
 ON MATING SURFACES:
 FLASH GOLD PER ASTM B 488, OVER
 0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
 0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
 ON LEADS:
 0.00127 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
 LUBRICATION (MIN MATING SURFACES):
 SURFACE CONDITIONER AFTER PLATING.

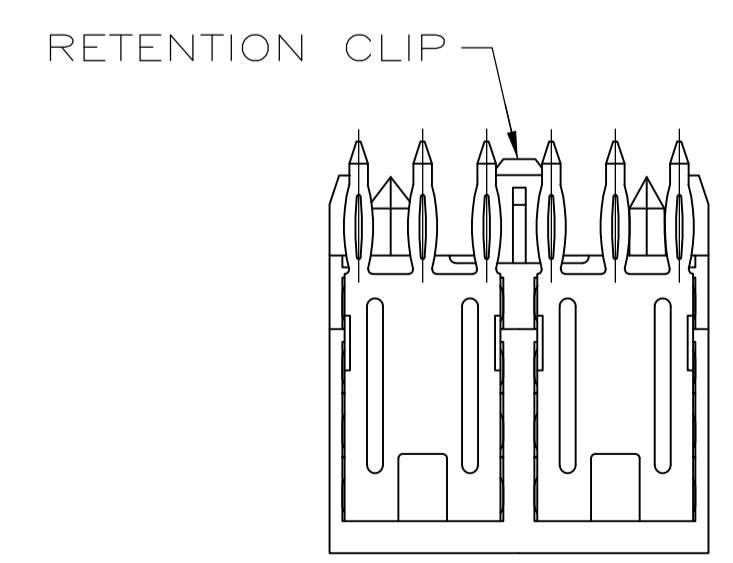

RECOMMENDED CIRCUIT PATTERN
 PER IPC-D300 TYPE II, CLASS C
 (COMPONENT SIDE)

10	5	6	1	11.88	3	8	5536614-1
E	D	C	B	A	FINISH	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		D.R.BENDER 11/04/92		Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		D.S.HEADER 04/20/93			
0 PLC ± -		1 PLC ± -		NAME: Z-PACK 2mm FB, POWER MODULE, RCPT. ASSY.			
1 PLC ± -		2 PLC ± 0.13		PRODUCT SPEC: 4 ROW, 3.56mm LEAD LENGTH			
2 PLC ± -		3 PLC ± -		APPLICATION SPEC: PRESS FIT LEAD			
3 PLC ± -		4 PLC ± -		SIZE: A1			
4 PLC ± -		ANGLES ± -		CAGE CODE: 00779			
MATERIAL: 1 2 3		FINISH: 3		DRAWING NO: 5536614			
CUSTOMER DRAWING		SCALE: 4:1		SHEET 1 OF 1 REV 01			