


REV. 0
DCO 64189

COIL: @ 25°C

CUSTOMER DATA SHEET

| SET | RESET |
|------------------------|------------------------|
| 1500 OHMS ±10% | 1500 OHMS ±10% |
| 28 VDC NOMINAL VOLTAGE | 28 VDC NOMINAL VOLTAGE |
| 7.1 mADC MUST OPERATE | 7.1 mADC MUST OPERATE |

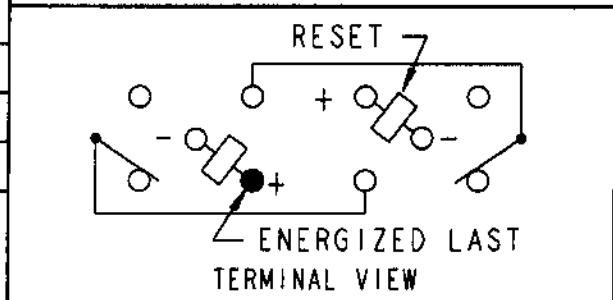

ENVIRONMENT:

VIBRATION 10 Hz 3000 Hz 30 g's
 SHOCK 150 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

NOTES: SET AND RESET TIME 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

DR. B.D. 11/29/01 CK 11/29/01

CII Technologies
 advanced control electronic solutions

CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "3SAM" RELAY

3SAM6004N2