

REV. 4
DCO 144148


COIL: @ 25°C	
RESISTANCE	170 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.7 VDC
MUST RELEASE	1.15 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 15 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

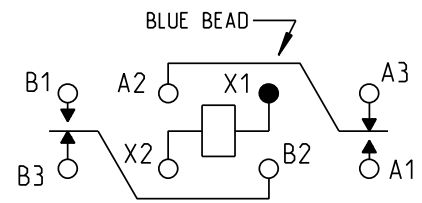

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. R.B. 11/11/91

CK. J.M.B. 1/24/06

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/23-038 REV.

"07" RELAY

B07D932BZ2-0354