

COIL: 5.0 VDC @ 25°C

WINDING #1

45 OHMS ±10% @ 25° C

2.7 VDC MUST OPERATE

WINDING #2

45 OHMS ±10% @ 25° C

2.7 VDC MUST OPERATE

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C


NOTES: OPERATE TIME 5 MS MAX.

CONTACT STABILIZATION 2.5 MS MAX.

OTHER SPECIFICATIONS IN ACCORDANCE WITH  
MIL-R-39016/45

CUSTOMER DATA SHEET

LAST ENERG.

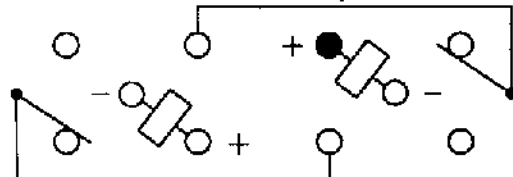

CONTACT RATING: 2 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/25/96 CK. *V25/96*

COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. COMMERCIAL  
CUST. NO. M39016/45-002M

TYPE "LS" RELAY

LS-9502M