


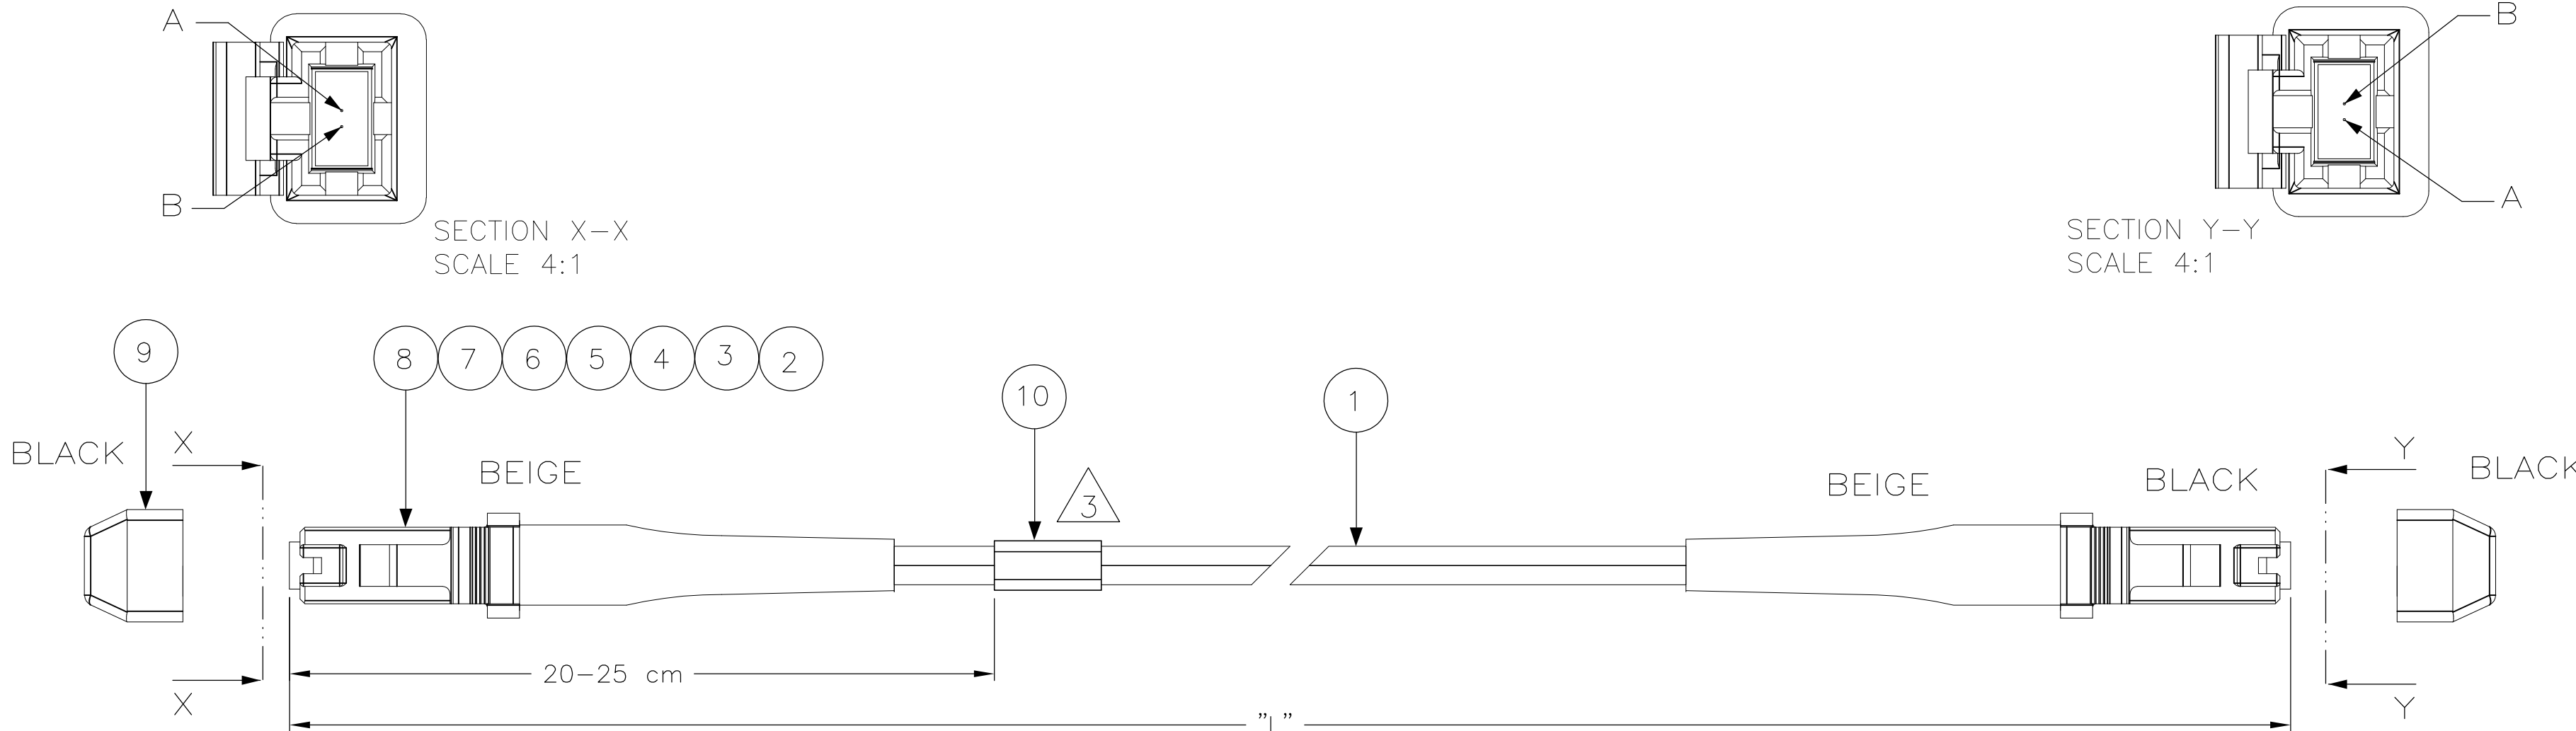

NOTES:


- ATTENUATION ≤ 0.5 dB, MEASURED AT 1300 nm
ACCORDING IEC 61300-3-4 EQUILIBRIUM MODE CONDITION
- SUPPLY FILLED OUT TEST RESULT SHEET WITH EACH
INDIVIDUALLY PACKED ASSEMBLY
- 3

 DAT-85 LABEL INFO:
 - UNIQUE SERIAL NUMBER
 - TYCO LOGO PN
 - MANUFACTURING LOCN.
- 4

 DAT-35 LABEL INFO:
 - BAR CODE
 - PN FACTORY ORDER NUMBER
 - CABLE LENGTH (L)
 - UNIQUE SERIAL NUMBER
- CROSS OVER AS PER BELOW TABLE

FIBRE COLOR	LEFT CONN.	RIGHT CONN.
WHITE	B	A
BLUE	A	B

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (Meter)
X-6206613-Y	XY,0
9-6206613-0	0,5
9-6206613-1	1,5
9-6206613-2	2,5
9-6206613-3	3,5
9-6206613-4	4,5
9-6206613-5	5,5
9-6206613-6	6,5
9-6206613-7	7,5
9-6206613-8	8,5
9-6206613-9	100,0
8-6206613-7	150,0
8-6206613-8	250,0
6-6206613-9	4 2000,0 -0/+5 m

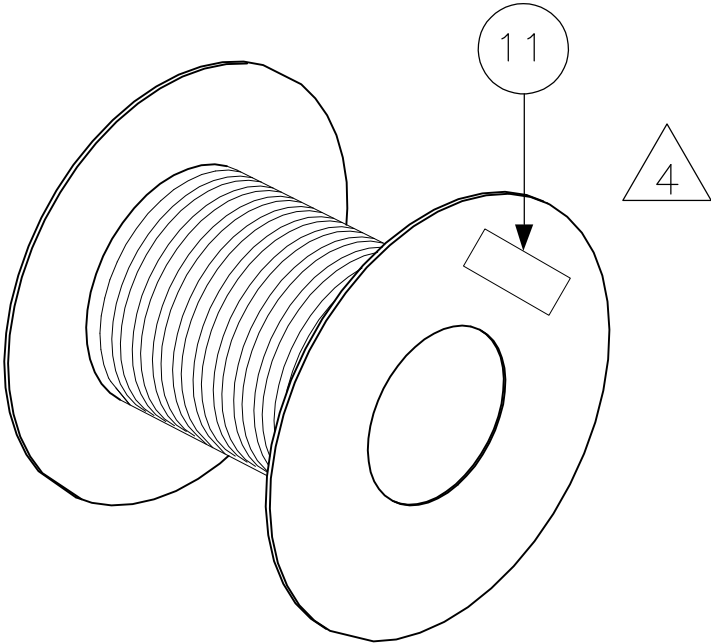

1	-	DAT-35 LABEL	11
1	-	FOAC DAT-85 LABEL ON REEL	10
2	-	DUST COVER MT-RJ	9
2	-	MT-RJ HOUSING	8
2	-	MT/RJ FERRULE, THERMOPLAST,MM	7
2	-	PIN KEEPER, 3.8MM	6
2	-	SPRING, MT-RJ, 3.8 DESIGN	5
2	-	MT-RJ, SPRING PLUSH, UNIVERSAL	4
2	-	CRIMP EYELET MT-RJ	3
2	-	MT-RJ BOOT, TWIN ZIP BEIGE	2
L	-	FOCAB 62.5/125 MINI ZIP, GRAY	1
Qty	Part Number	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

± -

± -

± -

± -

± -

± -

-

MATERIAL

-

DWN

GIRIYAPPA. M

24 AUG 05

CHK

DIWAKAR BELAVADI

24 AUG 05

APVD

DIWAKAR BELAVADI

24 AUG 05

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

NAME

FOMM62,5 LEAD 1,8 MTRJ PLUG FEMALE
- MTRJ PLUG FEMALE

SIZE

A2

CAGE CODE

00779

DRAWING NO

C-6206613

RESTRICTED TO

-

SCALE

NTS

SHEET

1 OF 1

REV

A1