


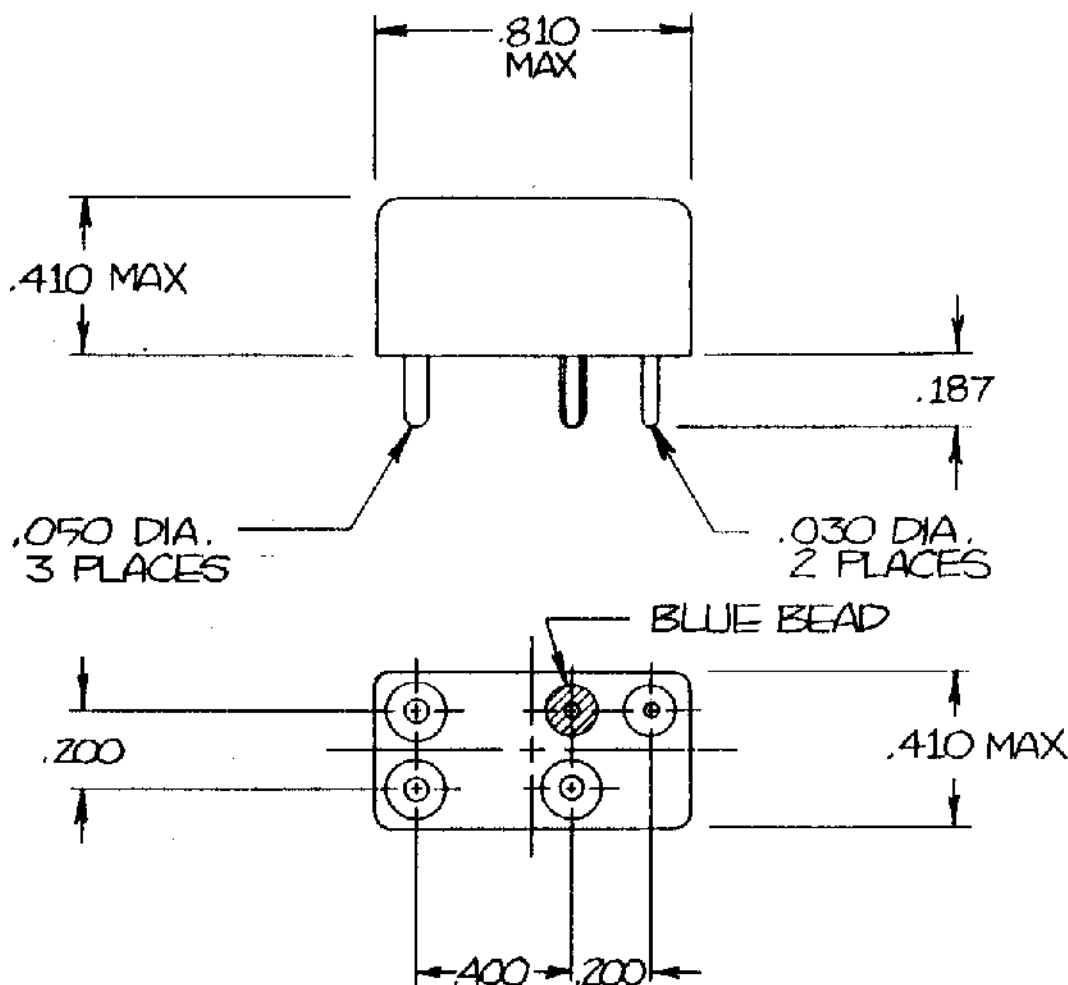

COIL:


RESISTANCE 160 Ω $\pm$ 10 %
 NOMINAL VOLTAGE 12 VDC
 MUST OPERATE 6.4 VDC
 MUST RELEASE 0.9 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 5 MS.DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: DIELECTRIC - 1000 VRMS EXCEPT
500 VRMS ACROSS OPEN CONTACTS.

CUSTOMER DATA SHEET

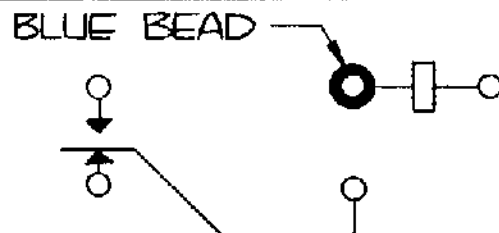

CONTACT RATING: 10 AMP/28 VDC
RESISTIVE 50,000 OPERATIONS

DR. R.B. 5-7-90 CK. 1/11/91 JmB



Communications
Instruments, Inc.

CUST. CII STD
 CUST. NO. _____

TYPE "C" RELAY

CAW-1C-12B