


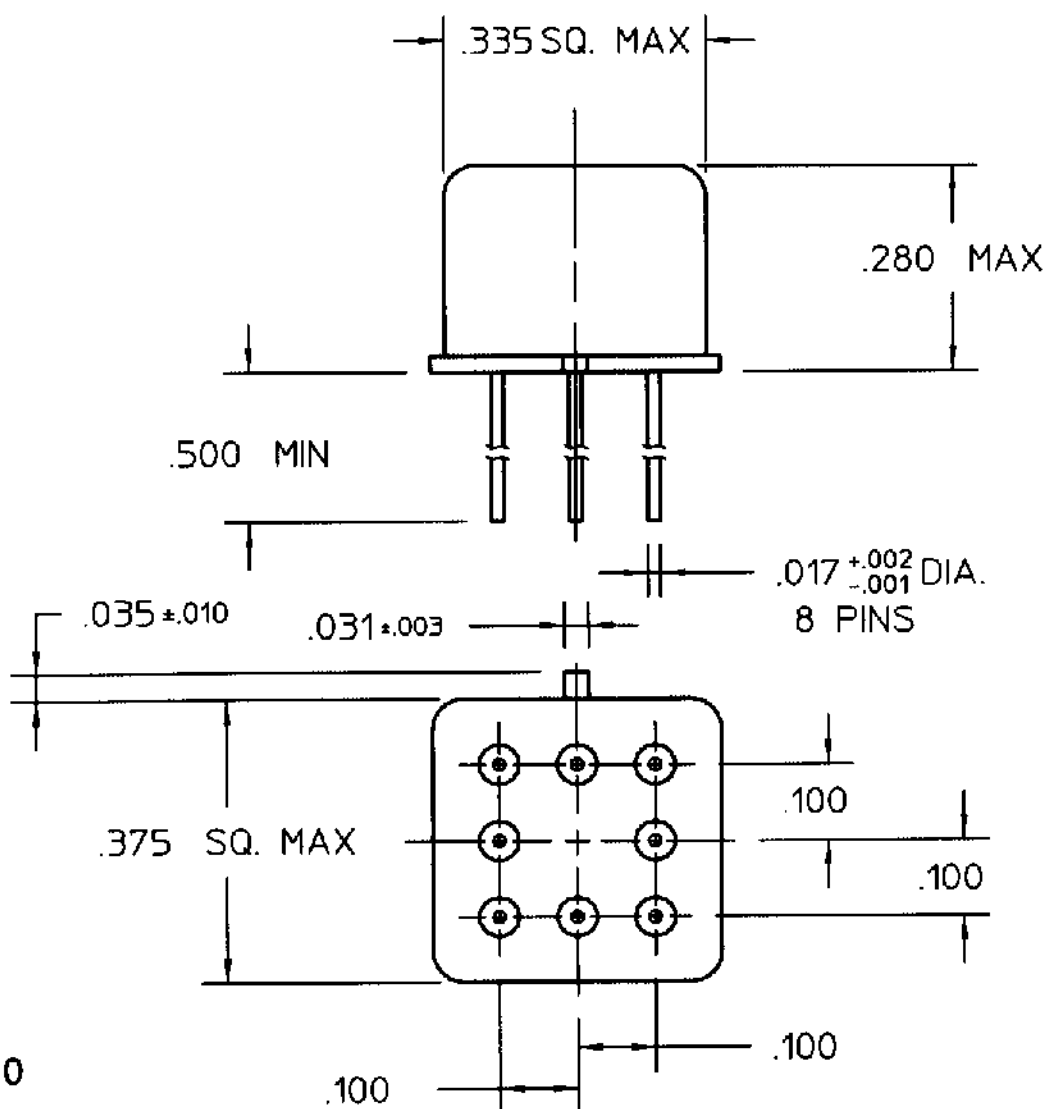

REV. 0

DCO 141854

COIL: @ 25°C
 RESISTANCE _____ 50 OHMS $\pm 10\%$
 NOMINAL VOLTAGE _____ 5.0 VDC
 MUST OPERATE _____ 2.7 VDC


 MUST RELEASE _____ 1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE TIME 2.0 MS MAX
 _____ RELEASE TIME 1.5 MS MAX
 _____ CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 3/13/00

K. JERRY 3/13/00



COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. _____ C.I.I.
 CUST. NO. _____ COTS STD. _____ REV. _____

'PRMGA' RELAY

PRMGAC-5X