# SAFETY ORGANIZATIONS THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED

IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS

LL RECOGNIZED: LL 1283 CSA CERTIFIED: CSA 22.2, # 8 VDE APPROVED: VDE 565-3

HAVE BEEN MET:

#### OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 3 AMP, 120/250 VAC, 3 AMP/40°C, 250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.22 mA@ 120V 60Hz 0.38 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Io, IS AS FOLLOWS: T = T =  $\sqrt{85 - T_{\rm c}}$  $I_0 = I_r$ 

### RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES IN FOR 8 SECONDS

#### TEST SPECIFICATIONS:

INDUCTANCE: 1.45 mH NOMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

CATALOG # 3EEBP

ECN # | APPRVD. | DATE

LINE TO GROUND: 0.0058 µF ±20% 0.0485 µF ±20% LINE TO LINE:

DISCHARGE RESISTOR: 1.5 Ms

L/G AND L/L I.R

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC, 20°C AND 50% RH


#### RECOMMENDED RECEIVING INSPECTION HIPOT:

1500VAC OR 2250VDC FOR 1 MINUTE LINE TO GROUND:

LINE TO LINE: 1450VDC FOR 1 MINUTE

#### FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

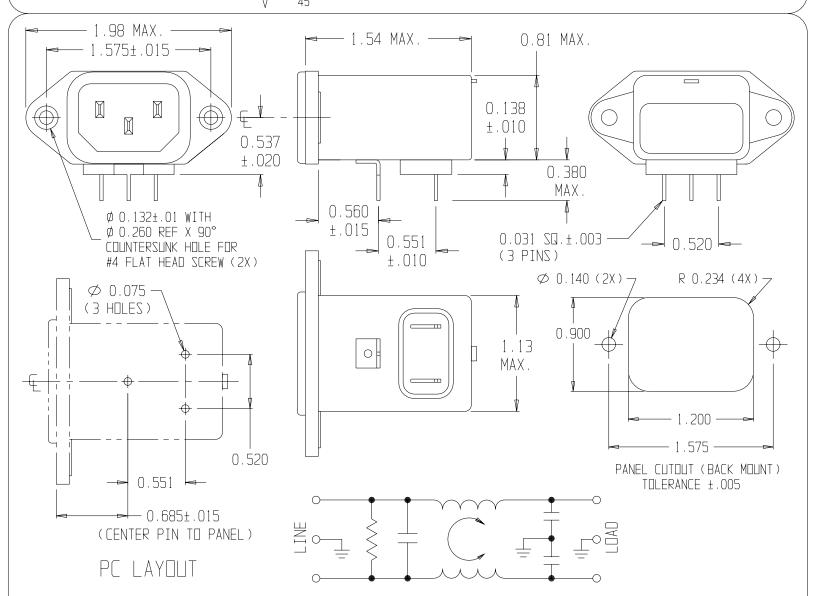

	50a-50a(MINIMUM) INSERTION LOSS											
	FREQUENCY MHz		. 05	. 10	. 15	. 50	1	3	5	10	30	
	COMMON dB		10	15	19	30	36	-	48	50	47	
	DIFF. dB			1	2	11	14	25	38	44	40	

PROJECTION UNLESS OTHERWISE SPECIFIED.

THIRD ANGLE

TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED

This document is proprietary to CORCOM INC and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S prior written consent.



## POWER LINE FILTER

-	CAD FILE: C:	/CK/CD/3EEBP00	)	
	SCALE: NITS	DATE:	CATALOG NO.	REV.
	1/1/2	3/24/97	OFFIDE	
	DRW. BY:	ORIG:	3 KKBP	()()
	JF	KAW	32221	" "